



Single String PWM Charging Control Booster Constant Current All-in-one Machine 3220 3228 3238 Instruction Manual

Product model	Application scenario
3220-S	-S Single string PWM charging control boost constant current all-in-one machine
3228-S	
3238-S	
3220-G	-G Single string PWM with inductive function charging control booster constant current all-in-one machine (External induction module)
3228-G	
3238-G	
3220-I	-I Single string PWM with IOT function charging control booster constant current all-in-one machine(External communication module)
3228-I	
3238-I	
3228-AC	-AC Single string PWM with AD/DC Hybrid Complementary function charging control booster constant current all-in-one machine (External power module)

1. Product characteristics

1. The lithium batteries are fully connected in parallel, the number of cycles is many, the service life is long, and the production is simple and stable.

2. The battery does not need a protection board, because the system comes with dual protection of software and hardware, which has been verified by millions of lamps and lanterns for 5 years, and the protection is stable and reliable.

3. Extremely low dormant current, more energy-saving, convenient for long-distance transportation and storage.

4. According to the real-time capacity of the battery and solar charging capacity, the power of the lighting is adjusted autonomously, which not only ensures the brightness and lighting time, but also ensures 365 day light.

5. A variety of intelligent power modes can be selected, and the load power can be automatically adjusted according to the battery power.

6. High-precision digital boost constant current control algorithm, high-efficiency and high-constant current accuracy.

7. LED short-circuit/open-circuit/ power limit protection and so on multi-protection functions.

8. Extensible sensing function.

9. Extensible IOT (Internet of Things) remote communication monitoring function.

10. All aluminum metal shell, IP67 waterproof level, can be used in a variety of harsh environments.

2. Operation Instructions

2.1 PWM Charging Introduction

The solar controller adopts advanced series pulse-width modulation (PWM) mode, with PWM wide range of regulation from 0 to 100%, which enables quick and stable charging of the battery under any system conditions.

The PWM charging mode is to charge the battery with the pulse current of automatic change duty cycle, so the pulsating charging can make the battery more safe and fast full charge, the disconnection period makes the oxygen and hydrogen produced by the chemical reaction of the battery have time to re-combine and be absorbed, so that the concentration polarization and ohmic polarization are naturally eliminated, thereby the internal pressure of the battery is reduced, and the battery can absorb more power. The pulse charging mode makes the battery have a more adequate reaction time, reduces the amount of gas (gas produced during the charging and discharging of battery), and improves the acceptance rate of the battery to the charging current.

2.2 Dormant and Wake-up:

1. Going to the dormant

A. Press the **[Exit]** button of the RC1 remote control, the controller shuts down all external control devices and enters the dormant state with extremely low power consumption to avoid the lithium battery feed caused by long-term non-use;

B. Press the **[OFF]** button of the RC2 remote control, the controller shuts down all external control devices and enters the dormant state with extremely low power consumption to avoid the lithium battery feed caused by long-term non-use;

Note: The dormant function is prohibited for long-term storage or transportation.

2. Wake up from the dormant

A. After the controller is dormant, if the photovoltaic panel is connected, the controller can be awakened to charge when the charging conditions are met during the day, and the load will be automatically turned on at night.




B. After the controller is dormant, if press the **[ON]** button of the RC2 remote control, you can directly wake up the controller to turn on the light even though the photovoltaic panel is not connected.

The dormant and wake state transitions are as follows:

Controller State Remote	Dormancy	Wake-up	Charge	Discharge	LED indicator status after dormancy
RC1	Hold down the [Exit] button	–	–	–	Extinguish all
RC2	Tap the [OFF] button	–	–	–	Extinguish all
Battery overdischarge	After 10 mins Automatic dormancy	–	–	–	The red indicator blinks every 1 second
–	–	PV charge 10 seconds	It can be charged normally during the day.	It can discharge normally after waking up at night.	–
RC2	–	Tap the [ON] button	It can be charged normally during the day.	After waking up, the light will automatically turn on for 2 seconds to test whether the load is normal; It can be discharged normally at night.	–

2.3 Status indication

The 3220/3228/3238 controllers have three indicator lights

LED Light	Indicative content	State	Function	Remote control system status
	Green indicator light Indicates charging state	Constant light	The photovoltaic panel voltage is greater than the photocontrol voltage	Start the light control
		Extinguish	The photovoltaic panel voltage is less than the photocontrol voltage	Off the light control
		Slow flashing	Be Charging	Be Charging
		Quick flashing	Battery is fully charged	Battery is fully charged
	Red indicator light Indicates battery state	Constant light	Battery is working fine	Normal operation
		Extinguish	The battery is not connected or the remote shuts down	Not running or shutdown status
		Slow flashing	Battery overdischarge	Overdischarge
		Quick flashing	LED load short circuit	Short-Circuit
	Blue indicator light Indicates load state	Constant light	The load is turned on	Discharge
		Extinguish	The load is turned off	Leisure
		Slow flashing	LED load percentage output	Percentage discharge
		Quick flashing	LED load is disconnected	Open-circuit
3228-AC	Yellow indicator light Indicates AC state	Constant light	The external power supply is turned on, and it is not connected to the AC supply	Not connected to the AC
		Slow flashing	The external power supply is turned on, and connected to the AC supply.	connected to the AC


2.4 Sensing function

Controller is divided into two types: human infrared induction (MESxx -IR) and microwave induction (MESxx -WB) :

Human infrared sensor is a kind of sensing product made by using the principle of pyroelectric effect, that is, a phenomenon that generates electric charge due to temperature change. The detection range of the infrared

sensor probe will be affected by the difference between the temperature of the human body and the environment, and the higher the environment temperature (the closer to the human body temperature), the less sensitive the sensor.

Microwave inductive sensor is a moving object detector designed by using the principle of the Doppler effect. It detects whether the position of an object has moved by using a non-contact way, and then generates the corresponding switching operation. It has strong anti- RF interference ability, and is not affected by temperature, humidity, light, airflow, dust ,etc.



The type of induction	θ (Angle)	H ((Light Pole Height))	D(Induction Width)
IR(Infrared)	60 °	6 ~ 8m	9 ~ 14m
WB(Microwave)	65 °	6 ~ 9m	10 ~ 16m

2.5 IOT functions

IOT function: smart street lights IOT based on IOT technology can achieve intellectualized control of street lamp lighting, thereby improving the efficiency and quality of street lamp lighting. Main advantages:

1. On-demand lighting: realize automatic control of lighting;
2. Remote monitoring: real-time monitoring of the running status of the street lamp, and remote operation of the street lamp switch, remote adjustment of the lighting time;
3. Anomaly monitoring: It can monitor whether the street lamp is abnormal in real time, which is convenient for timely examine and repair.

2.6 AD/DC Hybrid Complementary function

AD/DC Hybrid Complementary: Solar street lights usually use solar energy systems to supply electricity, but once the battery power supply is insufficient due to weather or other reasons, the controller will switch the power supply line to AC supply.


Because of the addition of the AC, compared with the pure solar system, the lighting of the AD/DC hybrid complementary system is more stable and can not be affected by the weather, but also because the AC is needed to lay cables, so it completely loses the advantages of convenient installation of solar street lights.

The mains complementary controller cannot sleep using the remote control.

2.7 Intelligent Power

Intelligent power: When the battery supply is insufficient due to weather or other reasons, in order to ensure the lighting time, the controller starts the smart power reduction to reduce the output power in the preceding period to ensure that there is power in the later time period.

Intelligent power reduction is shown as follows:

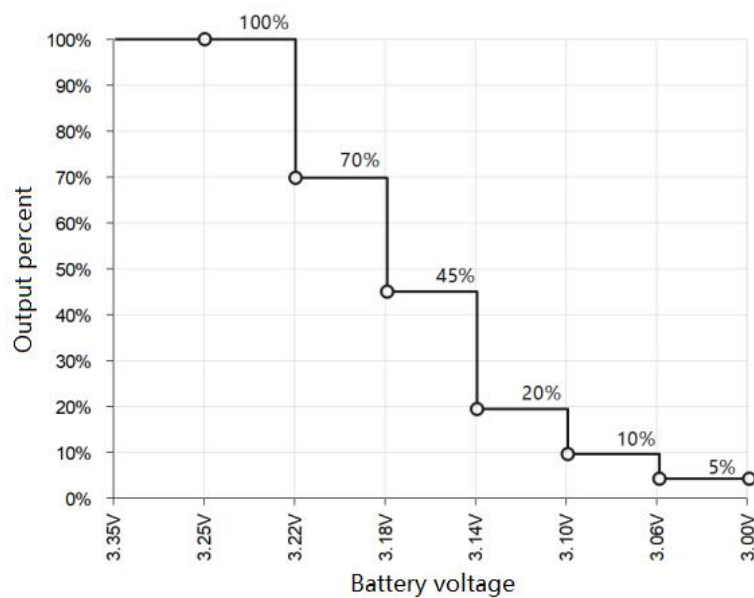



2.8 Size drawing:

3220 3228 size as follows:

Product size: 82×59×25mm

Installation size: 76×43.3

Installation aperture: $\varnothing 4.0 \times 8.0$

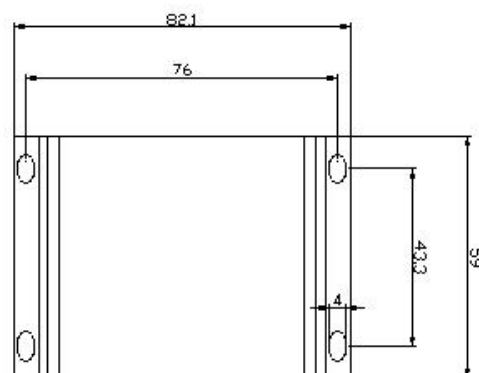
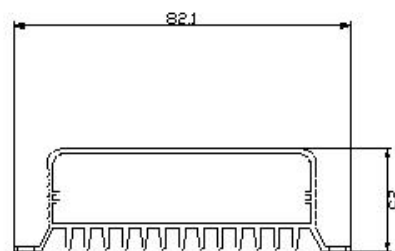


3238 3228-AC size as follows:

Product size: 100×82×25mm

Installation size: 76×43.3

Installation aperture: $\varnothing 4.0 \times 8.0$

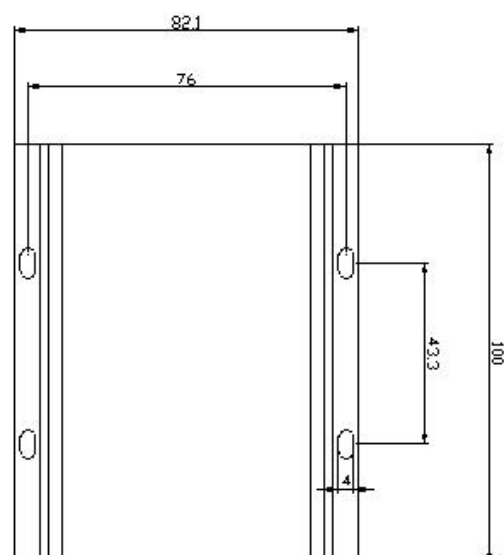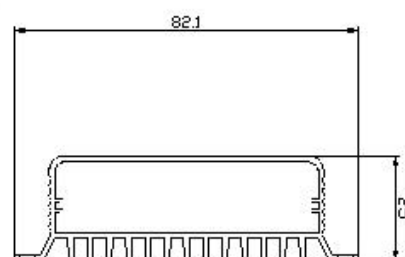

3. Technical parameter

Parameter Name	Parameter Value			Parameter Adjustable	Default Value
Model number	3220	3228	3238		
Controller type	Pwm Charging, Load Boost ,Constant Current				
System voltage	Single String Lithium Iron Phosphate Battery				
Static power consumption	≤20mA				
Dormant power consumption	≤6mA				
Load current	0.33A~1.32A	0.33A~1.65A	0.33A~1.98A	√	0.33
Load voltage	9V~30V				
Load LED string number	Vf (Lamp Bead Voltage) =3.0V: 3~10 Strings Vf (Lamp Bead Voltage) =6.0V: 2~5 Strings				
Maximum load power	20W	30W	40W		
Load conversion efficiency	97%				
Load current accuracy	< 3%				
Intelligent power	Automatic				
Load working period	5 stage time control +1 stage morning light	4 stage time control +4 stage induction		Support	
Time adjustment amplitude	30mins				
Power adjustment amplitude	5%				
Maximum charging current	14A	20A	20A		
Solar input voltage	< 9V				
Solar input power	80W	120W	120W		
Overvoltage	3.65V				
Charge return voltage	3.45V				
Overdischarge voltage	2.65V				
Light-controlled voltage	On: 1.5V, Off: 2.0V			√	中
Light control delay	5S~60S			√	5S

Operating temperature	-35°C~+65°C				
Class of protection	IP67				
Protection function	Photovoltaic Panel Reverse Connection Protection, Photovoltaic Panel Overpressure Protection, Lithium Battery Overcharge And Overdischarge Protection Lithium Battery Bms Overvoltage Detection Protection, Load Short Circuit Protection, Load Overcurrent Protection				
Weight (g)	160	170 3228-AC: 315	260		
Controller Size (mm)	82×59×25	82×59×25 3228-AC: 100×82×25	100×82×25		

4. Protection Function

◆ Waterproof Protection

Waterproof rating: IP67

◆ lithium battery BMS overcharge detection protection

When the controller detects that the BMS is overcharged, the controller immediately stops charging to prevent the high voltage of the photovoltaic end from being added to both ends of the BMS for a long time, resulting in high voltage damage to the BMS.

◆ High temperature protection

When the ambient temperature is higher than the set value, the controller stops charging and discharging to prevent the risk of damage to the lithium battery due to excessive temperature.


◆ Photovoltaic input overvoltage protection

If the input voltage of the PV panel is too high (reaches 25-30V), the controller automatically cuts off the PV input.

◆ Photovoltaic input reverse protection

When the photovoltaic array polarity is reversed, the controller will not be damaged, and will continue to work normally after correcting the wiring error.

◆ Load limit power protection



When the customer uses the LED lamp power is too large, or the regulating load current is too large, the controller will limit the load power output to less than the rated power to ensure that the controller and the LED load will not be damaged.

◆ **Load short-circuit protection**

When a short circuit occurs, the controller immediately cuts off the load output to prevent damage to the controller. After the load short-circuit condition is lifted, the controller will automatically restore the output within 1 minute (if it is short-circuit for a long time, it will automatically restore the output once an hour), or press the remote control test button (CU or mini2) to automatically restore the output after 10S.

◆ **Load open circuit protection**

When the LED load light is on normally and the load connection is suddenly disconnected, the controller is not damaged.


◆ **Anti-charge protection at night**

Prevent the battery from discharging through the panel at night.



5. Electrical Wiring Diagram

3220 3228 3238 Wiring Diagram:

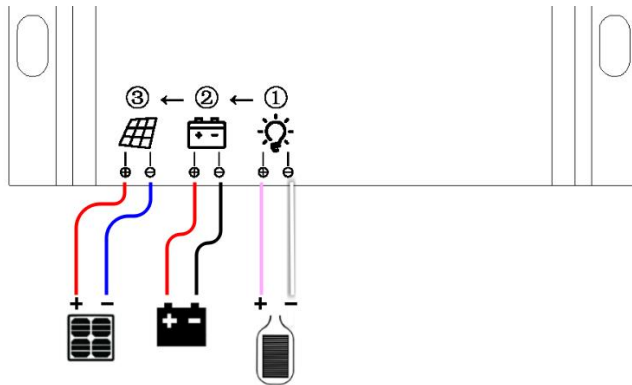

3228-AC Wiring Diagram:

